

SKILLFULLY ENGINEERED FOR YEARS OF TROUBLE FREE SERVICE

IDEAL FOR: Mixing concrete — mortar — feeds and chemicals — For small contractors — farmers — laboratories — the do-it-yourself-man.

Load-Balanced drum,
one-piece cast bottom

Steel Belt Guard

23" tilting handle,
rubber grip

Heavy cast yoke

Drip shield to
protect motor

Drilled motor
mount plate

12 Gauge steel
gusset plates

1½ x 1½ steel angle
frame, all welded


Basic 24T Features



ADJUSTABLE CHARGING HEIGHT . . . loosen one bolt, move drum to desired height and tighten bolt.



ONE-PIECE, SEMI-STEEL DRUM RING GEARS are integrally cast with drum bottom in one piece . . . permanent alignment.



BATCH-A-MINUTE MIXING DRUM . . . mixing blades put mix through four mixing actions with each turn of the drum.

SPECIAL 2TM ALL STEEL MIXER

2 Cu. Ft. model with built-in motor



Drum: 24" diameter all steel, 38" charging height.

Mixing Blades: 4 with batch-A-minute action.

Tilting Mechanism: Load balanced drum mounted in heavy steel yoke, 23" tilting handle.

Skids: 2" x 4" x 37" Hardwood.

Power: Heavy duty 1/3 H.P. special service electric motor mounted integral with the drum yoke. Combination double reduction gear and belt drive.

Gilson

FARM & HOME MIXERS


All mixers may look alike, but when you compare the construction and performance features — you will find over 50 years of mixer building knowledge reflected in every Gilson mixer! You get fast, thorough mixing action, with no separation of large or small aggregates. You get a thoroughly mixed batch in one minute.

For amateurs or professionals, a hundred interesting products, footings, and drives, walks and walls, outdoor grills and patios, all surprisingly easy and interesting. A must on the farm for mixing feeds and innoculating seeds. You **SAVE MORE** — **EARN MORE**, when you add a Gilson mixer to your money-saving tools.

24T SERIES SPECIFICATIONS


24T-WS

The basic mixer on 2 x 4 x 32" hardwood skids. 24" drum diameter, 4 mixing blades, 38" charging height. Pre-drilled engine mounting plate and drip shield. Available without power or with 1/3 electric motor or 2 H.P. gasoline engine and engine house. All GILSON mixers can be charged or discharged from either side.

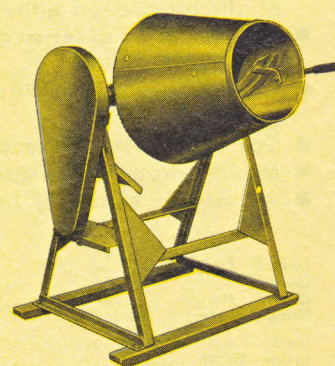


24T-RW

The same mixing drum and power options as the basic 24T but with 10 x 2.75 semi-pneumatic tires for easy spotting and added convenience for moving about the farm or job site. Absence of sharp hard-to-clean corners permits easy cleaning by simply flushing with a hose on all GILSON mixers.

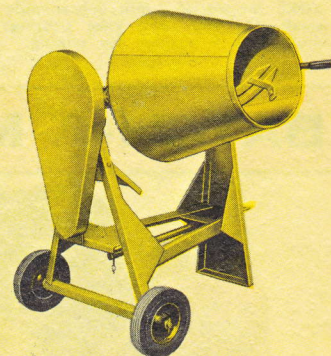

24T-PT

Built for towing at moderate speeds with 4.00 x 8 pneumatic tires and roller bearing wheels. Comes complete with engine house, the same power options and drum specifications as the basic 24T unit. Handy for small crew contact work. Lockable engine house and removable towing pole.

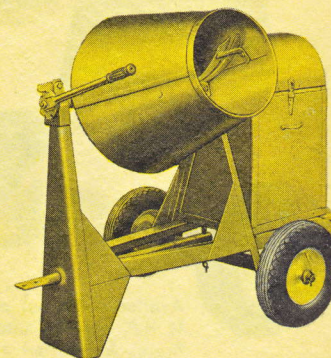

popular 3 CU. FT. MODELS

Ideal For:

- FARMERS
- THE DO-IT-YOURSELF MAN
- LABORATORIES
- SMALL CONTRACTORS

GENERAL SPECIFICATIONS

- Punched steel ring gear.
- Yoke carrying drum is rigid and unbreakable.
- 7-inch semi-steel drum bearing with extra dirt-proof grease chamber and zerk fitting.
- Pinion shaft revolves in semi-steel bearing with zerk grease fitting.
- Full capacity mixtures are discharged with ease and lock holds drum on either side of frame in most desirable mixing position . . . can be charged or discharged on either side.
- Rubber grip discharge lever provides perfect operating control.
- All electrically welded steel frame with heavy gussets.
- Cast semi-steel drive pinion.
- Mixing drum of 12 gauge steel stamping.
- Adjustable charging height.

	311	313	314
Overall Length	38"	45"	56"
Overall Width	28"	33"	40"
Overall Height	47"	48"	46"
Shipping Weight (lbs.)	175	205	300
Inside Front Diameter	25"		
Inside Depth	25"		
Drum Opening	15½"		
Capacity — Dry	3 cu. ft.		
Capacity — Wet	5 cu. ft.		


MIXING DRUM of 12 gauge steel stamping.

YOKE formed of 3-inch unbreakable and rigid steel channel . . . semi-steel yoke ends and yoke bearings replaceable . . . drum lock holds drum in any position for mixing . . . discharge height, 24 inches.


Mix Concrete
Mix Mortar
Blend Seeds
Mix animal Feeds



MODEL 311
Mounted on two
2" x 4" wood skids.



MODEL 313
Equipped with 10 x 1.75 semi-pneumatic rubber tired wheels; Handle for easy moving; Motor guard and pulley guard; 2" x 2" heavy steel angle axle support.

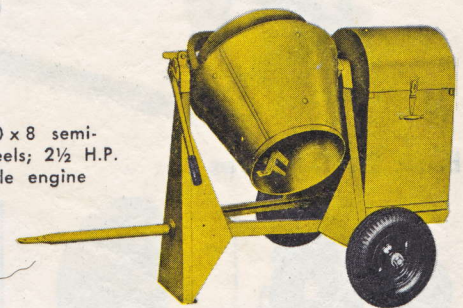

MODEL 314
Two-wheel trailer mounting, 4.00 x 8 semi-pneumatic tire roller bearing wheels; 2½ H.P. Briggs & Stratton engine, lockable engine housing, removable towing pole.

BATCH-A-MINUTE PERFORMANCE

SKILLFUL ENGINEERING
QUALITY CONSTRUCTION

MODEL R HEAVY-DUTY MIXER

BUILT FOR SAFE, CONVENIENT TRAILING



Available without power, with
½ H.P. electric motor or with
Briggs & Stratton 4 cycle
2¼ H.P. gasoline engine.









- ALL-STEEL DRUM
- ALL-STEEL UNBREAKABLE YOKE
- CAST SEMI-STEEL RING GEAR AND DRIVE PINION
- TIMKEN BEARING EQUIPPED THROUGHOUT
- FOUR-BLADE MIXING ACTION FOR BATCH-A-MINUTE PRODUCTION
- BALANCED DRUM FOR EASY TILTING, 3 POSITION LOCK
- DRUM OPENING REINFORCED WITH HEAVY STEEL BAND
- WELDED HEAVY STEEL FRAME
- REMOVABLE TOW POLE
- 4.00 x 8 PNEUMATIC TIRES, 48½" TREAD
- HIGH-SPEED TAPERED BEARING WHEELS
- SHIPPED COMPLETELY ASSEMBLED
- EXTRA HEAVY ENGINE MOUNTING PLATE AND ALL-STEEL ENGINE HOUSE



SPECIFICATIONS

Drum Diameter	26"
Drum Height	26"
Drum Opening	16"
Discharge Height	27"
Length — Less Tow Pole	56"
Width	52"
Height	56"
Weight (without power)	320 lbs.
Color of Paint:	Construction Yellow

All Prices F.O.B. Factory Subject to Change Without Notice.

	Model	Description	List Price	Ship. Wt.	
<p align="center">2 cu. ft. FARM & HOME CONCRETE MIXERS</p>					
	24T-WS	On wood skids, less power, with pulley guard ...	\$ 84.95	175	
	24T-WSM	With 1/3 hp 60C Special Service elec. motor	119.95	195	
	24T-WSE	With 2 hp B&S #60152 air-cooled gasoline engine, with engine house	174.95	235	
	24T-RW	On 10x2.75 semi-pneumatic tires, less power, with pulley guard	99.95	190	
	24T-RWM	With 1/3 hp 60C Special Service elec. motor	135.95	210	
	24T-RWE	With 2 hp B&S #60152 air-cooled gasoline engine, with engine house	189.95	245	
	24T-PT	Trailer model on 4.00x8 pneumatic tires, less power, with engine house	147.95	265	
	24T-PTM	With 1/3 hp 60C Special Service elec. motor	182.95	280	
	24T-PTE	With 2 hp B&S #60152 air-cooled gasoline engine	229.95	300	
	2T-M	On wood skids, all-steel drum, with 1/3 hp 60C Special Service electric motor mounted on yoke ..	129.95	205	
<p align="center">3 cu. ft. RENTAL and CONTRACTOR ALL-STEEL MIXERS</p>					
	311	On wood skids, less power, less pulley guard	\$ 99.95	175	
	311-M	With 1/3 hp 60C Special Service elec. motor	143.95	200	
	311-E	With 2 1/2 hp B&S #80152 air-cooled gasoline engine, with engine house	198.95	225	
	313	On 10x1.75 semi-pneumatic tires, with pulley guard, less power	114.95	205	
	313-M	With 1/3 hp 60C Special Service elec. motor	154.95	225	
	313-E	With 2 1/2 hp B&S #80152 air-cooled gasoline engine, with engine house	209.95	250	
	314	Trailer model on 4.00x8 pneumatic tires, less power, with engine house	219.95	265	
	314-MX	Less power, but with jack shaft for electric motor drive	249.95	275	
	314-M	With 1/3 hp 60C Special Service elec. motor	289.95	300	
	314-E	With 2 1/2 hp B&S #80152 air-cooled gasoline engine	299.95	315	
<p align="center">EXTRA HEAVY-DUTY RENTER MODEL</p>					
	R	On 4.00x8 pneumatic tires, Timken bearing wheels, less power, with engine house	\$247.95	320	
	R-M	With 1/2 hp 60C 1 ph electric motor	314.95	340	
	R-E	With 2 1/4 hp B&S #61352 gasoline engine	324.95	340	
<p align="center">Engineering may be changed without notice</p>					

